

इंटरनेट

मानक

Disclosure to Promote the Right To Information

Whereas the Parliament of India has set out to provide a practical regime of right to information for citizens to secure access to information under the control of public authorities, in order to promote transparency and accountability in the working of every public authority, and whereas the attached publication of the Bureau of Indian Standards is of particular interest to the public, particularly disadvantaged communities and those engaged in the pursuit of education and knowledge, the attached public safety standard is made available to promote the timely dissemination of this information in an accurate manner to the public.

“जानने का अधिकार, जीने का अधिकार”

Mazdoor Kisan Shakti Sangathan

“The Right to Information, The Right to Live”

“पुराने को छोड़ नये के तरफ”

Jawaharlal Nehru

“Step Out From the Old to the New”

IS 7360 (1992): 1, 5-Dichloroanthraquinone, Technical [PCD 9: Organic Chemicals Alcohols and Allied Products and Dye Intermediates]



“ज्ञान से एक नये भारत का निर्माण”

Satyanarayan Gangaram Pitroda

“Invent a New India Using Knowledge”



“ज्ञान एक ऐसा खजाना है जो कभी चुराया नहीं जा सकता है”

Bhartrhari—Nitiśatakam

“Knowledge is such a treasure which cannot be stolen”

BLANK PAGE



भारतीय मानक

1, 5-डाईक्लोरोऐन्थ्राक्विनोन, तकनीकी --- विशिष्टि

(पहला पुनरीक्षण)

Indian Standard

1, 5-DICHLOROANTHRAQUINONE,
TECHNICAL --- SPECIFICATION

(*First Revision*)

UDC 668'812 : 547'673'2

© BIS 1992

BUREAU OF INDIAN STANDARDS
MANAK BHAVAN, 9 BAHADUR SHAH ZAFAR MARG
NEW DELHI 110002

July 1992

Price Group 3

**AMENDMENT NO. 1 MARCH 2002
TO
IS 7360 : 1992 1,5-DICHLOROANTHRAQUINONE,
TECHNICAL — SPECIFICATION**

(First Revision)

(Foreword, Structural Formula) — Insert the following below the structural formula:

'(CAS No. 82-46-2).'

(Foreword, para 3, line 2) — Substitute 'gained' for 'gained'.

[*Page 1, Table 1, Sl No. (i)*] — Delete 'percent by mass, Max'.


(PCD 11)

Reprography Unit, BIS, New Delhi, India

FOREWORD

This Indian Standard (First Revision) was adopted by the Bureau of Indian Standards, after the draft finalized by the Dye Intermediates Sectional Committee had been approved by Petroleum, Coal and Related Products Division Council.

1, 5-Dichloroanthraquinone ($C_{14}H_6O_2Cl_2$) is an important intermediate used in the manufacture of vat dyes. It is represented by the following structural formula:

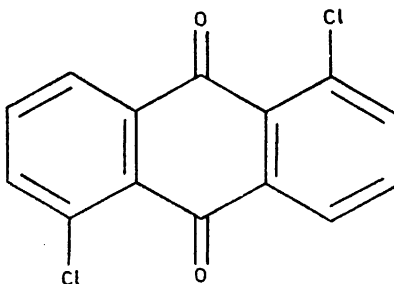

1, 5-DICHLOROANTHRAQUINONE
(Molecular Mass 277)

This standard was first published in 1974. The Committee responsible for its preparation decided to update the standard in light of experience gained. In this version, the requirement of assay and impurities such as 1-chloroanthraquinone and 1, 8-dichloroanthraquinone have been stipulated. The requirement for melting point has been modified and oxygen flask method has been introduced for determination of organically bound chlorine.

For the purpose of deciding whether a particular requirement of this standard is complied with, the final value, observed or calculated, expressing the result of a test or analysis, shall be rounded off in accordance with IS 2 : 1960 'Rules for rounding off numerical values (*revised*)'. The number of significant places retained in the rounded off value should be the same as that of the specified value in this standard.

Indian Standard

1, 5-DICHLOROANTHRAQUINONE, TECHNICAL — SPECIFICATION

(First Revision)

1 SCOPE

This standard prescribes the requirements and the methods of sampling and tests for 1,5-dichloroanthraquinone, technical.

2 REFERENCES

The following Indian standards are necessary adjuncts to this standard:

IS No.	Title
915 : 1975	One-mark volumetric flasks (<i>first revision</i>)
1070 : 1977	Water for general laboratory use (<i>second revision</i>)
1839 : 1961	Toluene, reagent grade
2552 : 1989	Steel drums (galvanized and ungalvanized)
5299 : 1969	Methods of sampling and tests for dye intermediates

3 REQUIREMENTS

3.1 Description

The material shall be in the form of light yellow powder and shall be free from visible impurities.

3.2 The material shall also comply with the requirements given in Table 1.

4 PACKING AND MARKING

4.1 Packing

The material shall be packed in steel drums (*see* IS 2552 : 1989) lined with suitable polyethylene film or as agreed to between the purchaser and the supplier.

4.2 Marking

4.2.1 Each container shall be securely closed and shall bear legibly and indelibly the following information:

- a) Name of the material;
- b) Indication of source of manufacture;
- c) Batch number, if any;
- d) Net mass of the material; and
- e) Month and year of the manufacture.

4.2.2 The containers may also be marked with the Standard Mark.

Table 1 Requirements for 1, 5-Dichloroanthraquinone, Technical

(Clauses 3.2, 5.3 and 6.1)

SI No.	Characteristic	Requirement	Method of Test, Ref to
(1)	(2)	(3)	(4)
i)	Melting range, percent by mass, <i>Max</i>	Shall melt within the range of 246° to 248°C	3 of IS 5299 : 1969
ii)	Moisture content, percent by mass, <i>Max</i>	0.5	9.3 of IS 5299 : 1969
iii)	Sulphated ash, percent by mass, <i>Max</i>	1.0	11.2 of IS 5299 : 1969
iv)	Chlorine content, percent by mass	24.5 to 25.5	Annex A
v)	Matter insoluble in hot toluene, percent by mass, <i>Max</i>	2.0	Annex B
vi)	Assay, percent by mass, <i>Min</i>	95	Annex C/D
vii)	Impurities:		
	a) 1-chloroanthraquinone	4	Annex C/D
	b) 1, 8-dichloroanthraquinone, percent by mass, <i>Max</i>		

5 SAMPLING

5.1 Representative samples of the material shall be drawn as prescribed in 3 of IS 5299:1969.

5.2 Number of Tests

5.2.1 Test for determination of chlorine, assay and impurities shall be conducted on each of the individual samples.

5.2.2 Tests for the determination of the remaining characteristics, namely, melting range, moisture content, sulphated ash and matter insoluble in hot toluene shall be conducted on the composite sample.

5.3 Criteria for Conformity

For declaring the conformity of the lot to the require-

ments of this specification, all test results on individual sample as well as composite sample shall satisfy the relevant requirements given in Table 1.

6 TEST METHODS

6.1 Tests shall be carried out according to the methods prescribed in Annexes and IS 5299:1969 as indicated in col 4 of Table 1.

6.2 Quality of Reagents

Unless specified otherwise, 'pure chemicals' and distilled water (see IS 1070:1977) shall be employed in tests.

NOTE — 'Pure chemicals' shall mean chemicals that do not contain impurities which affect the results of analysis.

ANNEX A

[Table 1, Item (iv)]

DETERMINATION OF CHLORINE (OXYGEN FLASK METHOD)

A-1 APPARATUS

A-1.1 Whatman Filter Paper No. 44 — sheet for the preparation of paper packet.

A-1.2 Ignition Flask

Place 25 ml distilled water in a clean 500 ml quickfit flask, add 5 ml of 2 N sodium hydroxide solution and 0.5 ml 100 volume hydrogen peroxide. Pass oxygen gas from O₂ gas cylinder for 5 minutes to replace air from the flask and stopper immediately. Cover the flask with wire gauge for safety.

A-1.3 Wire Gauge

A-1.4 Platinum Wire

A-1.5 Beaker — 500 ml capacity.

A-1.6 Gooch — crucible.

A-1.7 Oven — capable of maintaining temperature at $100^{\circ} \pm 5^{\circ}\text{C}$.

A-2 REAGENTS

A-2.1 Sodium Hydroxide Solutions — 2 N.

A-2.2 Hydrogen Peroxide — 100 volume.

A-2.3 Sulphuric Acid — 2 N.

A-2.4 Sodium Bisulphite — 2 percent (m/v).

A-2.5 Nitric Acid — 60 percent (m/v).

A-2.6 Silver Nitrate Solution — N/10 (m/v).

A-3 PROCEDURE

A-3.1 Weigh accurately by difference method about 0.04 g to 0.05 g of sample (previously sieved and dried) in a paper packet of Whatman Filter Paper No. 44 sheet previously folded using a small aluminum scoop. Place the paper packet in the gauze cup attached to platinum wire of the stopper, keeping the end of paper strip slightly projected.

A-3.2 Ignite the tip of the paper packet. When it just reaches the packet, immediately insert it into the flask and hold the stopper firmly. Cover the flask with wire gauze for safety. After ignition is over, tilt the flask upside down so that the seals the flask from inside. Keep the flask rightdown for 15 minutes. Intermittently shake the flask vigorously so as to ensure complete absorption of fumes. Remove the stopper wash platinum wire and gauze quantitatively with few ml of distilled water into the flask. The solution is ready for estimation.

A-3.3 Chlorine Estimation

Transfer the solution quantitatively into 500-ml beaker and boil for 5 minutes to remove peroxide. Cool and neutralize with 2N sulphuric acid (normally 5 ml required). Then add 10 ml of 2 percent sodium bisulphite solution, 10 ml of 60 percent nitric acid. Boil to expel SO₂ gas. Cool and filter the solution through buchner funnel dressed with double filter paper No. 1.

Transfer the filtered solution quantitatively to 500-ml beaker and add 10 ml of N/10 AgNO₃. Boil to coagulate the precipitates. Cool and filter through previously weighed Gooch crucible. Wash the precipitates to make it acid and chloride free. Then dry at $100^{\circ} \pm 5^{\circ}\text{C}$ to constant mass.

A-4 CALCULATION

$$\text{A-4.1 Chlorine content percent by mass} = \frac{M \times 24.74}{M_1}$$

where

 M = mass of precipitates (AgCl); and M_1 = mass of sample taken.**ANNEX B**

[Table 1, Item (v)]

DETERMINATION OF MATTER INSOLUBLE IN TOLUENE**B-1 APPARATUS****B-1.1 Conical Flask** — 500 ml.**B-1.2 Sintered Glass Crucible** — G4, two.**B-1.3 Reflux Condenser****B-2 REAGENT****B-2.1 Toluene** — reagent grade (see IS 1839 : 1961).**B-3 PROCEDURE****B-3.1** Weigh accurately about 1 g of the sample in a 500-ml conical flask and add about 150 ml of toluene

to the flask. Reflux for about 30 minutes using a water condenser. Filter on a tared sintered glass crucible. Wash the conical flask, two to three times with hot toluene. Dry the sintered glass crucible in an oven at 100°-110°C for four hours. Cool the crucible to room temperature in a desiccator and weigh. The increase in the mass of the crucible is the mass of insolubles.

B-4 CALCULATIONS

$$\text{Matter insoluble in toluene, percent by mass} = \frac{M_1}{M_2} \times 100$$

where

 M_1 = mass in g of insolubles in toluene; and M_2 = mass in g of material taken.**ANNEX C**

[Table 1, Items (vi) and (vii)]

ASSAY AND DETERMINATION OF IMPURITIES**C-1 GENERAL**

Assay and impurities like 1-chloroanthraquinone and 1, 8-dichloroanthraquinone are estimated by spectrophotometric method.

C-2 REAGENTS**C-2.1 1-Chloroanthraquinone** — pure (100 percent, on dry basis).**C-2.2 1, 5-Dichloroanthraquinone** — pure (100 percent, on dry basis).**C-2.3 1, 8-Dichloroanthraquinone** — pure (100 percent, on dry basis).**C-2.4 1, 4-Dioxane** — dry.**C-3 APPARATUS****C-3.1 Infra-red Spectrophotometer** — Any suitable spectrophotometer.**C-3.2 Cells** — Two fixed cells for liquid with NaCl window and thickness of 0.5 mm.**C-3.3 One Mark Volumetric Flask** — See IS 915 : 1975.**C-4 PROCEDURE****C-4.1 Preparation of Sample Solution**

Weigh accurately about 150 mg of dry, pulverized and sieved (100 mesh) sample in a 25-ml volumetric flask. Add about 10-15 ml dry dioxane (C-2.4) and heat to boil on a hot plate to dissolve the sample. Cool to room temperature. Dilute up to the mark and shake well.

C-4.2 Preparation of Standard Solution

Weigh accurately about 150 mg of pure 1, 5-dichloroanthraquinone (C-2.2) in a 25-ml volumetric flask. Add accurately weighed about 3 mg each of pure 1-chloroanthraquinone (C-2.1) and 1, 8-dichloroanthraquinone (C-2.3). Add about 10 to 15 ml of dry dioxane (C-2.4) and heat to boil on a hot plate to dissolve the contents. Cool to room temperature. Dilute to the mark and shake well.

C-4.3 Fill the reference cell and sample of 0.5 mm path length with dry dioxane and adjust the instrument for the 100 percent transmittance, fill the sample cell with standard solution and read the optical density at

various wave lengths which correspond to different components as under:

Component	Wave length
1-chloroanthraquinone	964 cm ⁻¹
1,8-dichloroanthraquinone	733.3 cm ⁻¹
1-chloroanthraquinone <i>plus</i> 1,5-dichloroanthraquinone	709.3 cm ⁻¹

Read the optical density for the standard solution at the above wave lengths. Similarly run the instrument with sample solution and note the optical densities at the above wave lengths.

C-5 CALCULATION

C-5.1 1-chloroanthraquinone, $\frac{A \times B \times C}{D \times M}$ Say, X_1
percent by mass

where

- A = optical density of sample at 964 cm⁻¹;
 B = percent content of 1-chloroanthraquinone in standard solution;
 C = mass of pure 1-chloroanthraquinone;
 D = optical density of standard solution at 964 cm⁻¹; and
 M = mass of sample taken.

C-5.2 1,8-dichloroanthraquinone, $\frac{A_1 \times B_1 \times C_1}{D_1 \times M_1}$
percent by mass

where

- A_1 = optical density of sample at 733.3 cm⁻¹;
 B_1 = percent content of 1,8-dichloroanthraquinone standard solution;
 C_1 = mass of pure 1,8-dichloroanthraquinone;
 D_1 = optical density of standard solution at 733.3 cm⁻¹;
 M_1 = mass of sample taken.

C-5.3 1,5-dichloroanthraquinone *plus* 1-chloroanthraquinone, percent by mass $\left. \vphantom{\frac{A_2 \times B_2 \times C_2}{D_2 \times M_2}} \right\} = \frac{A_2 \times B_2 \times C_2}{D_2 \times M_2}$ Say, Y_1

where

- A_2 = optical density of sample at 709.3 cm⁻¹;
 B_2 = percent content of 1-chloroanthraquinone plus 1,5-dichloroanthraquinone in standard solution;
 C_2 = mass of pure isomers;
 D_2 = optical density of standard solution at 709.3 cm⁻¹; and
 M_2 = mass of sample taken.

C-5.4 1,5-dichloroanthraquinone content, percent by mass = $Y_1 - X_1$

where

- Y_1 is as calculated in C-5.3, and
 X_1 is as calculated in C-5.1.

ANNEX D

[Table 1, Items (vi) and (vii)]

ASSAY AND DETERMINATION OF IMPURITIES (ALTERNATE METHOD)

D-1 GENERAL

1,5-dichloroanthraquinone and impurities like 1-chloroanthraquinone and 1,8-dichloroanthraquinone are estimated by High Pressure Liquid Chromatographic Method.

D-2 REAGENTS

D-2.1 1-Chloroanthraquinone — pure (100 percent on dry basis).

D-2.2 1,5-Dichloroanthraquinone — pure (100 percent on dry basis).

D-2.3 1,8-Dichloroanthraquinone — pure (100 percent on dry basis).

D-2.4 Acetonitrile — spectroscopy grade.

D-3 APPARATUS

D-3.1 High Pressure Liquid Chromatograph — Any suitable chromatograph with a reverse phase

column. One set of typical parameters of HPCL is given below:

- i) Column — Bondapak C₁₈
- ii) Temperature — 25°C
- iii) Wavelength — 254 nm
- iv) Flow Rate — 1.4 ml/Min
- v) Attenuator — 0.1
- vi) Chart Speed — 10 mm/Min
- vii) Load on Column — 5 µl
- viii) Solvent System — Acetonitrile:water::60:40

D-3.2 'A' Grade Volumetric Flask

D-4 PROCEDURE

D-4.1 Preparation of Sample Solution

Weigh accurately 0.025 g of well mixed (previously ground and dried) sample and transfer into 100 ml volumetric flask using 80 ml of acetonitrile (D-2.4) and heat to boil on hot plate to dissolve the sample.

Cool to room temperature. Dilute to mark using acetonitrile and mix well. Call this solution S.

Pipette 5.0 ml of solution S into 100 ml standard volumetric flask and dilute to 100 ml mark using acetonitrile. Mix well. Call this solution S_1 .

D-4.2 Preparation of Standard Solutions

(1) 1-Chloroanthraquinone — Pure.

Weigh accurately 0.025 g of pure 1-chloroanthraquinone previously dried and transfer into 100-ml standard volumetric flask using 80 ml of acetonitrile (D-2.4). Heat to boil on hot plate to dissolve. Cool at room temperature and make up to mark using acetonitrile. Mix well. Call this solution A.

Pipette 5 ml of solution A into 100-ml standard volumetric flask and dilute to 100 ml mark using acetonitrile. Mix well. Call this solution A_1 .

(2) 1, 8-Dichloroanthraquinone — Pure.

Weigh accurately 0.05 g of pure 1, 8-dichloroanthraquinone previously dried and transfer to 100-ml standard volumetric flask using 80 ml of acetonitrile. Proceed as above to prepare solution B and B_1 .

(3) 1, 5-Dichloroanthraquinone — Pure.

Weigh accurately 0.05 g of pure 1, 5-dichloroanthraquinone previously dried. Proceed in the same way to prepare solution C and C_1 .

D-4.3 When steady base line is obtained, inject 5 μ l solution of each standard from solution A_1 , B_1 and C_1 . Also inject 5 μ l of sample solution S_1 .

D-5 CALCULATION

1, 5-Dichloroanthraquinone, percent by mass	=	Concentration of standard	×	Area of peak in sample	×	Strength of standard
				Concentration of sample	×	Area of peak of standard
1-Chloroanthraquinone, percent by mass	=					as above
1, 8-Dichloroanthraquinone, percent by mass	=					as above

Standard Mark

The use of the Standard Mark is governed by the provisions of the *Bureau of Indian Standards Act, 1986* and the Rules and Regulations made thereunder. The Standard Mark on products covered by an Indian Standard conveys the assurance that they have been produced to comply with the requirements of that standard under a well defined system of inspection, testing and quality control which is devised and supervised by BIS and operated by the producer. Standard marked products are also continuously checked by BIS for conformity to that standard as a further safeguard. Details of conditions under which a licence for the use of the Standard Mark may be granted to manufacturers or producers may be obtained from the Bureau of Indian Standards.

Bureau of Indian Standards

BIS is a statutory institution established under the *Bureau of Indian Standards Act, 1986* to promote harmonious development of the activities of standardization, marking and quality certification of goods and attending to connected matters in the country

Copyright

BIS has the copyright of all its publications. No part of these publications may be reproduced in any form without the prior permission in writing of BIS. This does not preclude the free use, in the course of implementing the standard, of necessary details, such as symbols and sizes, type or grade designations. Enquiries relating to copyright be addressed to the Director (Publications), BIS.

Revision of Indian Standards

Indian Standards are reviewed periodically and revised, when necessary and amendments, if any, are issued from time to time. Users of Indian Standards should ascertain that they are in possession of the latest amendments or edition. Comments on this Indian Standard may be sent to BIS giving the following reference :

Doc : No PCD 11 (762)

Amendments Issued Since Publication

Amend No.	Date of Issue	Text Affected

BUREAU OF INDIAN STANDARDS

Headquarters

Manak Bhavan, 9 Bahadur Shah Zafar Marg, New Delhi 110002
Telephones : 331 01 31, 331 13 75

Telegrams : Manaksanstha
(Common to all Offices)

Regional Offices:

Telephone

Central : Manak Bhavan, 9 Bahadur Shah Zafar Marg
NEW DELHI 110002

{ 331 01 31
{ 331 13 75

Eastern : 1/14 C. I. T. Scheme VII M, V. I. P. Road, Maniktola
CALCUTTA 700054

37 86 62

Northern : SCO 445-446, Sector 35-C, CHANDIGARH 160036

53 38 43

Southern : C. I. T. Campus, IV Cross Road, MADRAS 600113

235 02 16

Western : Manakalaya, E9 MIDC, Marol, Andheri (East)
BOMBAY 400093

612 92 95

Branches : AHMADABAD. BANGALORE. BHOPAL. BHUBANESHWAR. COIMBATORE.
FARIDABAD. GHAZIABAD. GUWAHATI. HYDERABAD. JAIPUR. KANPUR.
LUCKNOW. PATNA. SRINAGAR. THIRUVANANTHAPURAM.